



**Armstrong®**

# ARMSTRONG STEAM HARNESS

AN INTELLIGENT SYSTEM SOLUTION FOR  
THE ANIMAL FEED INDUSTRY

## GLOBAL EXPERTISE FOR THE AGRI-FEED SUPPLY CHAIN


### ARMSTRONG CAN SATISFY YOUR INDUSTRY'S TOUGHEST CHALLENGES

As global leaders in steam and condensate system management, Armstrong understands the complex issues you face every day. We have a worldwide network of resources, and more than a century of in-depth knowledge and experience, all devoted to improving efficiency, reducing energy use, and lowering costs for your organization. Solving your problems and making things easier for you is the reason we're here.

### ABOUT ARMSTRONG INTERNATIONAL

Founded in 1900, Armstrong International is a privately held, fifth-generation, family-owned company. Our unique heritage of knowledge, experience and insight reaches back more than a century, enabling us to serve you in ways no one else can. Often the first to market, Armstrong invented the inverted bucket steam trap and our company has been granted more than 70 patents on exceptional products, technology and software.

Today, Armstrong's industry-leading equipment is hard at work in more than 100 countries, saving time money and energy for companies like yours.

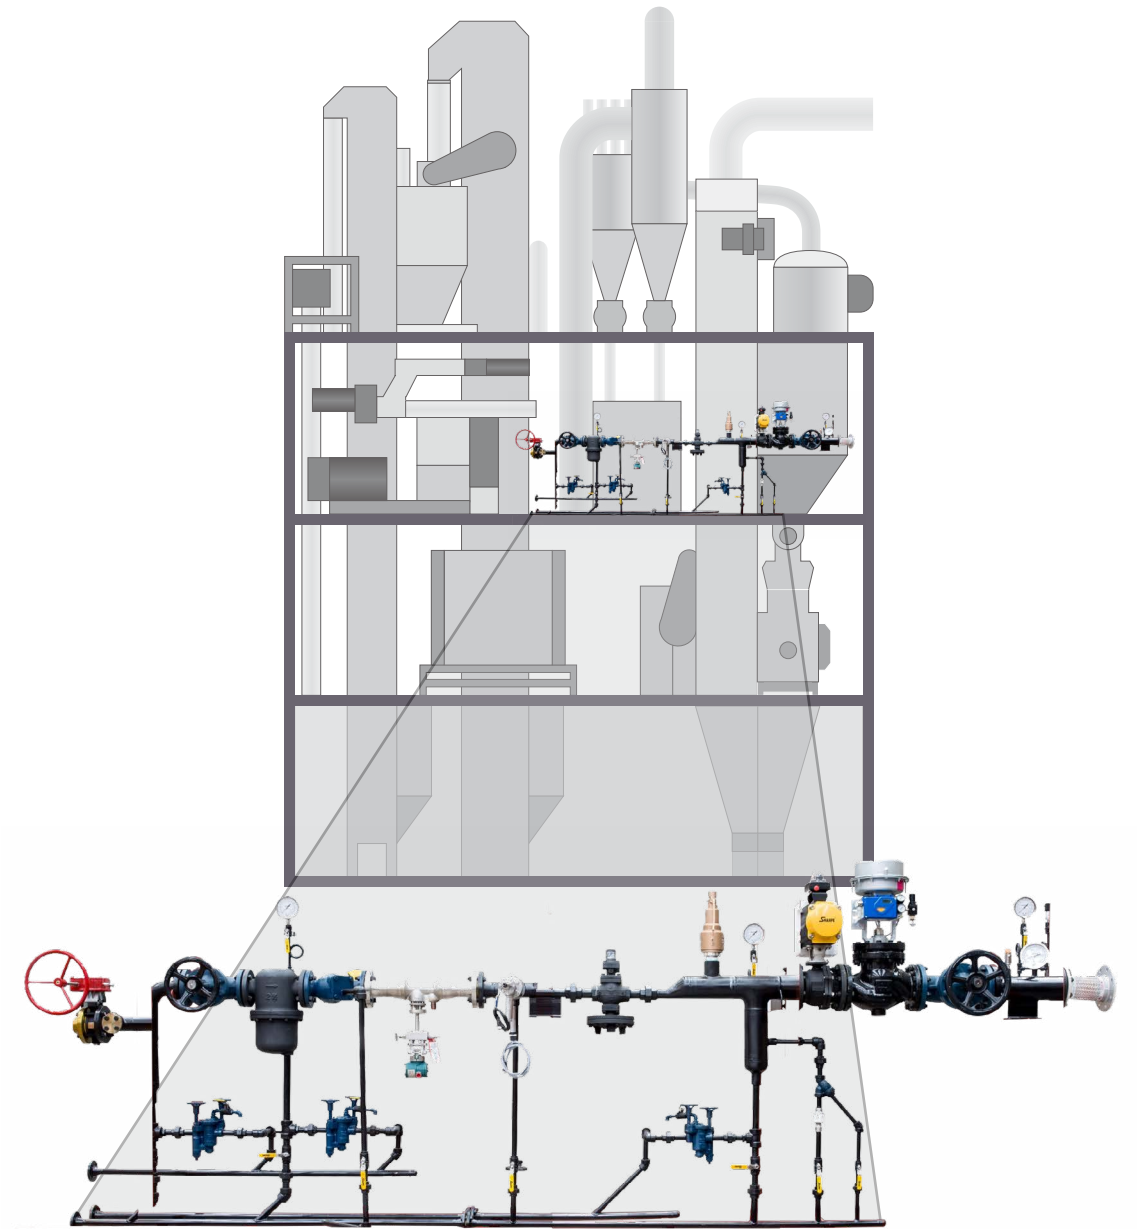

### ARMSTRONG STEAM HARNESS IS CUSTOMIZED TO SATISFY THE UNIQUE REQUIREMENTS OF YOUR INDUSTRY AND FACILITIES

We use a holistic, system approach that takes your entire plant into consideration. Our experts will design your Armstrong Steam Harness for ideal placement, ergonomics and operator safety within your facilities.

## ENGINEERED FOR PRODUCTIVITY, EFFICIENCY, PERFORMANCE AND ENERGY SAVINGS

### BOOST YOUR PRODUCTION AND YIELD, REDUCE STEAM CHOKES, AND CUT YOUR PRODUCT REJECTION RATE WITH ARMSTRONG STEAM HARNESS

Our comprehensive system solution combines Armstrong's dependable, long-lasting products and our state-of-the-art technology to reliably deliver the quality of steam your plant needs for a higher level of performance and efficiency.

#### ARMSTRONG STEAM HARNESS IS BUILT TO SOLVE YOUR PROBLEMS AND PREVENT THEM.

- | Fewer steam chokes and improved steam quality result in increased throughput and less reprocessing
- | Ensure proper condensate drainage and delivery of dry, measurable, quality steam to pellet mill or extruder
- | Allocate thermal cost and performance per formula; in certain cases, correlate with pelleting and extrusion parameters
- | Increase safety and reduce energy loss with thermal insulation blankets that can be removed for maintenance and then reused

## ARMSTRONG STEAM HARNESS IS A COMPLETE, FULLY INTEGRATED SYSTEM PACKAGE

### IMPROVE STEAM QUALITY AND SYSTEM PERFORMANCE IN YOUR NEW FACILITIES AND EXISTING PLANTS OF ALL SIZES, WORLDWIDE

Armstrong Steam Harness combines best-in-class quality, unparalleled value and a level expertise that only Armstrong can provide. The rugged, dependable products and cutting-edge technology in this comprehensive system package are all designed to work together as they consistently deliver an outstanding performance and a superior return on your investment.

#### EQUIPMENT, TECHNOLOGY AND SYSTEM PACKAGES YOU CAN DEPEND ON

The unwavering reliability, safety and efficiency of Armstrong products and systems is ensured by our stringent quality control, the rigorous support of our quality assurance and supply chain, and our manufacturing, engineering and maintenance teams. We also conduct real-time evaluations on many of our products using our state-of-the-art digital monitoring technology. Armstrong's products and packaged system solutions are backed by Armstrong's distinctive technical support.


#### COMPONENTS OF THE ARMSTRONG STEAM HARNESS

- |  |   |  |
|--|---|--|
| Steam quality monitor (QM®-1)  | Thermal insulation blankets (removable, reusable)   | Trap Valve Stations (TVS)                              |
| Steam flow meter (VERIS Accelabar®)  | High pressure and low pressure condensate return lines  | Isolation valves                                       |
| Data logger with integrated Human Machine Interface (HMI) or Programmable Logic Controller (PLC ) with Human Machine Interface (HMI) | Automatic on/off full port ball valve with visual and electrical indication of rotatory valve and actuator position | T-design drain separator                               |
| Steam pressure and temperature transducer  | Carbon steel Python® control valve with multilingual intelligent positioner   | Drip legs  |
| Bimetallic thermometer and pressure gauges   |   | Thermostatic steam trap                                |
|  |   | Pressure Reducing Valve (PRV)                          |
|  |   | Safety relief valve, internals made of stainless steel |
|  |   | Manual butterfly valve and other isolation valves      |



## HOW ARMSTRONG STEAM HARNESS WORKS

1. Plant steam enters Armstrong Steam Harness.
2. Manual butterfly valve at inlet provides complete isolation, as needed.
3. The Armstrong Steam QM®-1 sensor can be relocated to available nozzle, as needed, to measure steam quality upstream of Armstrong Steam Harness.
4. Drip leg captures condensate and dirt from plant steam distribution; Armstrong TVS inverted bucket steam trap drains condensate from drip leg; high pressure condensate return valve allows manual removal of particles captured by drip leg. **(A)**
5. Drain separator removes moisture and particles greater than 10 microns from steam; Armstrong TVS inverted bucket steam trap drains condensate from drain separator; high pressure condensate return. **(B)**
6. Pressure transducer installed at the top of separator translates inlet steam pressure and transmits signal to data logger/HMI or PLC/HMI supplied by Armstrong.
7. Steam passes through Y-type strainer that captures particles greater than 0.0055"; valve allows manual removal of particles; dirt goes to atmospheric discharge.
8. VERIS Accelabar® measures steam flow; signal transmitted to pellet mill or extrusion control system. **(C)**
9. Armstrong Steam QM®-1 measures steam quality; information transmitted to data logger/HMI or PLC/HMI supplied by Armstrong. **(D)**
10. Armstrong GP-2000 PRV reduces steam pressure. **(E)**
11. Pressure transducer installed downstream of PRV translates reduced steam pressure and transmits signal to data logger/HMI or PLC/HMI supplied by Armstrong.
12. Safety relief valve (ASME Code, as required) set to 10% above steam pressure.
13. Drip leg collects and drains condensate trapped between PRV and on/off isolation valve installed downstream, condensate drained to low pressure condensate return; thermostatic steam trap removes subcooled condensate, air and noncondensable gases (NCG), drained to atmospheric discharge.
14. Steam pressure transducer transmits pressure signal to pellet mill or extrusion control system and data logger/HMI or PLC/HMI supplied by Armstrong.
15. On/ off flanged full port ball valve with electro-pneumatic actuator is controlled by pellet mill or extrusion control system; mechanical switches available to confirm complete opening of valve to pellet mill or extrusion control system.
16. Pellet mill or extrusion control system transmits signal to multilingual intelligent positioner located on a Python® control valve, which feeds steam into conditioner; digital positioner sends feedback signal to pellet mill or extrusion control system, confirming opening percentage of control valve; all steam is direct injection. **(F)**
17. Bimetallic thermometer downstream of control valve monitors steam temperature feed to pellet mill or extruder and delivers information to operator.

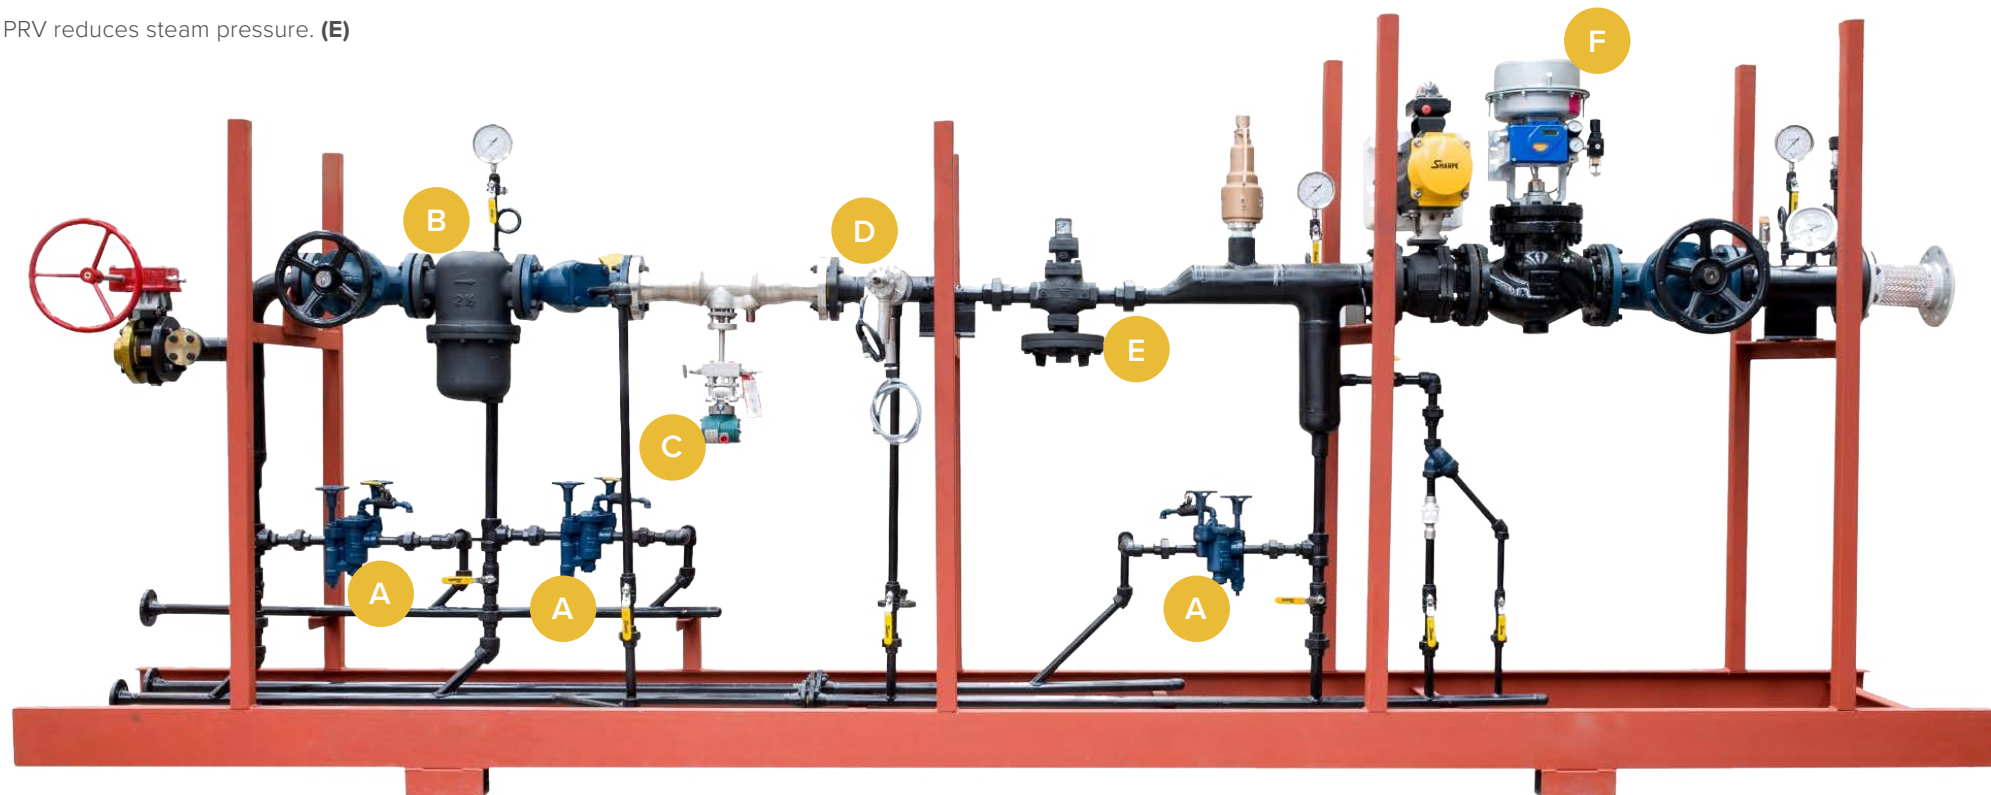



### STEAM QM®-1 AUTOMATIC STEAM QUALITY MONITORING

Quicker and consistently more reliable and accurate than manual methods, Armstrong's Steam QM®-1 automatically detects the dryness fraction of steam and provides continuous steam quality measurement data trending over time.



### VERIS ACCELABAR® FLOW MEASUREMENT

No straight run of pipe? No problem for Armstrong's patented flow meter. VERIS Accelabar® delivers reliable accuracy in utility metering and submetering without strict installation requirements. In a class of its own, this highly accurate flow measurement device has a patented no-straight-pipe installation requirement. VERIS Accelabar® provides exceptional versatility, with turndown capabilities over a large range of flow rates.


### PROGRAMMABLE LOGIC CONTROLLER (PLC) OR STAND-ALONE DATA LOGGER WITH INTEGRATED HUMAN MACHINE INTERFACE (HMI)

The PLC performs All thermal and cost calculations. Operators and personnel monitor system information in real time using HMI.



### PRESSURE REDUCING VALVES (PRVS)

Armstrong can help you manage your steam, air and liquid systems safely and efficiently with pressure reducing valves (PRVs) to maintain constant pressure for process control and uninterrupted productivity. We offer several types of PRVs to match your requirements.



### PYTHON® 1500 SERIES CONTROL VALVE

Armstrong's carbon steel, globe two-way single seated valves consistently deliver accurate and efficient control for most steam and liquid applications.

- | Body with top entry trim and bolted bonnet offers easy internal access for in-line inspection, maintenance, and trim replacement
- | Carbon steel material
- | Pneumatic actuators tested to three million cycles; designed with six springs to allow lower hysteresis and higher performance; two pneumatic actuator sizes
- | Reverse and direct acting actuators are field reversible
- | Packings: PTFE chevron seals and graphoil
- | Live spring loaded Teflon packing for long service and less maintenance
- | Parabolic equal percentage trims for accurate control
- | Metal to metal seats rated for Class IV shut off
- | 17-4 PH h900 plugs for long service and better resistance
- | 50:1 rangeability
- | Electric actuators
- | On/off and modulating characteristics

## SKILLED SERVICE AND SUPPORT—BEFORE, DURING AND AFTER INSTALLATION

### FROM ON-SITE AUDIT TO TURNKEY INSTALLATION AND ONGOING EXPERT SERVICE, ARMSTRONG DOES IT ALL

Every pellet mill or extruder has different piping configuration requirements, so we can begin by performing an on-site audit or assessment to measure your available space and determine the specific needs of your facilities surrounding the pellet mill or extruder. Evaluating the thermal infrastructure of your plant enables our specialists to ensure that your steam and condensate system is in excellent working order.

### ARMSTRONG'S EXPERTS ARE HANDS-ON AND WITH YOU THROUGHOUT EVERY STEP OF THE PROCESS AND BEYOND.

Our field service team can custom design and install your Armstrong Steam Harness based on their complete assessment of your needs. We have extensive drafting capabilities and experience in mechanical design and installation, enabling us provide an advanced level of service found only at Armstrong.

### WE WANT YOU TO ENJOY WORKING WITH ARMSTRONG

Armstrong is here to solve your problems and make your life easier. We become an integral part of your team, consistently delivering on our promises and exceeding your expectations while remaining transparent and simple to do business with. We want working with us to be an experience you enjoy, every single time.

## MONITORING AND MEASURING IN REAL TIME

### MAKE SMARTER, QUICKER DECISIONS BASED ON ACCURATE, UP-TO-DATE INFORMATION

Armstrong Steam Harness gives you real-time access to key parameters using the Human Machine Interface (HMI) with Programmable Logic Controller (PLC) or stand-alone data logger.

QUICK, EASY ACCESS TO KEY PARAMETERS	DATA LOGGER WITH INTEGRATED HMI COLOR QVGA SCREEN 2.4"	PLC/HMI <small>NOTE 1</small>
Steam pressure upstream of Armstrong Steam Harness		X
Steam quality	X	X
Steam quality per ton feed		X
Steam consumption per hour	X	X
Steam consumption per ton feed		X
Accumulated steam consumption (lb or kg)	X	X
Thermal energy input (MMBtu/h or kW)	X	X
Thermal energy per ton feed (MMBtu or kWh)		X
Steam cost per hour (local currency/h)	X	X
Steam cost per ton feed (local currency)		X
Motor amps per ton feed <small>NOTE 2</small>		X
Reduced steam pressure for feed conditioning	X	X

1. Production rate (4-20mA electrical signal) from pellet mill or extruder is required for tonnage
2. Current transformers, output 4-20mA


### PRECISE CALCULATION OF STEAM HARNESS PARAMETERS

By linking information from pellet mill or extruder to steam quality and flow, Armstrong Steam Harness allows you to determine optimum steam capacity and quality for a given formula—and then program your system accordingly to prevent chokes and reprocessing.

### SAGE® STEAM SYSTEM MONITORING, MEASURING AND REPORTING

SAGE® keeps you fully informed, 24 hours a day with regular updates, precise documentation, custom-filtered reports, and real-time alerts notifying you of any problems. This powerful software calculates steam loss data and reports it using Armstrong's proprietary, UNFCCC-approved, steam system efficiency methodology.

SAGE® is engineered to be a fully integrated part of your steam system. It works seamlessly with our real-time monitoring products (SteamEye® and AIM®), ensuring that it always has access to the most current data.

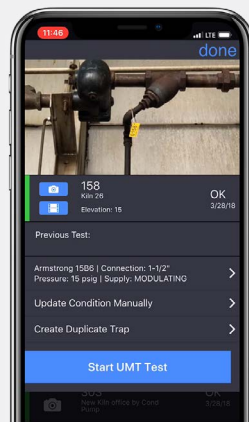

## BEST-IN-CLASS THERMAL UTILITY EQUIPMENT, TOOLS AND SERVICES

### DURABLE, HARDWORKING PRODUCTS AND CUTTING-EDGE TECHNOLOGY TO COMPLEMENT YOUR ARMSTRONG STEAM HARNESS

Armstrong can help you maximize production and yield, improve efficiency and safety, and stabilize or lower your overall utility costs with intelligent solutions in: steam and condensate, flow measurement, and heat transfer (coils). Our extensive manufacturing strength and flexibility enables us to custom design and build long-lasting equipment to meet the demands of your plant and industry.



### HEAVY DUTY COILS – SERIES 6000

Armstrong's heavy duty coils are manufactured for longer life under harsh, industrial conditions. Even in the most severe environments where coil leaks and corrosion are costly problems, Armstrong coils maintain high efficiency and output.



### THERMOSTATIC STEAM TRAPS

Armstrong Thermostatic Steam Traps are available with balanced-pressure bellows or wafer-type elements. Our thermostatic steam traps are constructed in a variety of materials, including stainless steel, carbon steel and bronze.



### LIQUID DRAINERS

Armstrong offers a wide range of liquid drainers to remove liquid continuously, automatically and efficiently.

- | Long life and trouble-free operation with minimal need for adjustment or maintenance
- | Reliable performance, even in the presence of dirt, grit and oil
- | Minimal air loss
- | Ease of repair

## CONTACT YOUR ARMSTRONG REPRESENTATIVE

If you're interested in learning more about Armstrong Steam Harness and all the rugged, dependable equipment and leading-edge technology it includes, contact your Armstrong rep for details.

To get more information or to find your representative, visit [armstronginternational.com](http://armstronginternational.com).



INTELLIGENT THERMAL UTILITIES SOLUTIONS FROM A GLOBAL  
LEADER IN ENERGY MANAGEMENT AND ENJOYABLE EXPERIENCES

**Armstrong International**  
The Americas | Asia | Europe, Middle East, Africa  
[armstronginternational.com](http://armstronginternational.com)